
Model #

# 2078AFGAC; 2078AFCAF McKenzie Media Tower (2Pk)

AFGAC = Glazed Antique Cherry finish AFCAF = Caffè finish

Assembly Instructions



#### Congratulations!

This fine piece of furniture will make a gorgeous addition to your home. For the best results, read the Assembly Instructions before you begin your project.

#### **IMPORTANT NOTES:**

- For normal household use only. Not recommended for commercial use.
- Do not overload the shelves.
- Unload items before you move this unit.
- Before you load or move this unit, tighten all screws and supports.
- Before you begin your project, completely read the Assembly Instructions.
- Store this item: 1- in its box; 2- in a dry place; 3- in temperatures that range from 40°F to 90°F (not on a cold and possibly damp cement floor).
- Periodically inspect your furniture for any loose glue joints, screws or any other problem that might affect the stability of your furniture. Tighten or repair as needed.

# **WARNING**

# Serious or fatal crushing injuries can occur from furniture tip-over. To help prevent tip-over:

- · Place heaviest items in the bottom drawers.
- Unless specifically designed to accommodate, do not set TVs or other heavy objects on top of this product.
- Never allow children to climb or hang on drawers, doors or shelves.
- Never open more than one drawer at a time.
   Use of tip-over restraints may only reduce but not eliminate the risk of tip-over.

DESIGN SUBJECT TO CHANGE WITHOUT NOTICE.

# CALL US FIRST! Do not return this item to the store

**Service Policy:** We will replace any part that is defective, missing or damaged during assembly. For a replacement part, directly contact Whittier Wood Products customer service department by phone, fax, mail or email.

**Hours:** Our friendly customer service staff can be reached Monday-Friday 7:00 a.m. to 5:00 p.m. (Pacific Time). You may leave a message 24 hours a day, seven days a week.

**To Order:** Provide the finish and furniture model number (upper portion of this page), the part letter, production code, quantity needed, reason for replacement and your full name, address and telephone number.

Parts ship from our Eugene, Oregon factory within one or two business days from the time we receive your request. Please allow five to ten business days for delivery.

**800-653-3336** • Outside the U.S. or Canada: 541-687-0213 • Fax: 541-687-2060 www.whittierwood.com • P.O. Box 2827 • Eugene, Oregon 97402, U.S.A.



Production Code:

VN 01/13

# 2078AFGAC; 2078AFCAF McKenzie Media Tower (2Pk)

Parts List

Please identify the parts and check that quantities received match those on this list. If you need to replace a part, refer to the following letter and part name.


Part	Description		Quantity
Α	Top Assembly (attached)		2
В	Case Assembly		2
С	Top Adjustable Shelf		2
D	Bottom Adjustable Shelf		2
	Dottom / tajuotablo Orion		<u>-</u>
Е	Door (installed)		2
F	Knob (attached)		2
G	#8 x 1-1/2" Machine Screw (installed)		2
Н	Shelf Bracket (installed)		16
I	#6 x 1/2" Undercut Screw (inserted)	(hills)	16
J	Insert Nut (inserted)		8
K	Small Adjustable Glide (installed)		8
L	Magnetic Lock & Plate (attached)		2 sets
М	Hinge (attached)	000	4
N	#6 x 5/8" Flat Head Screw (inserted)	(3) Million	24 (AFGAC) 0 (AFCAF)
0	#6 x 5/8" Undercut Screw (inserted)	(ma	4 (AFGAC) 28 (AFCAF)
Р	#6 x 5/8" Philtruss Screw (inserted)		4
Q	#8 x 1-1/4" Pan Head Screw (inserted)	<b>(*)</b>	16
TR	Furniture Tipping Restraint		2 sets

### 2078AFGAC; 2078AFCAF McKenzie Media Tower (2Pk)

Assembly Instructions

### **Tool Required: Phillips Screwdriver**

1. To move the Adjustable Shelves (C, D), remove the #6 x 1/2" Undercut Screws (I) and the Shelf (C, D). Insert the Shelf Brackets (H) into the desired hole and place the shelf on top of the brackets and insert the screws. See Figures 1 and 1a.

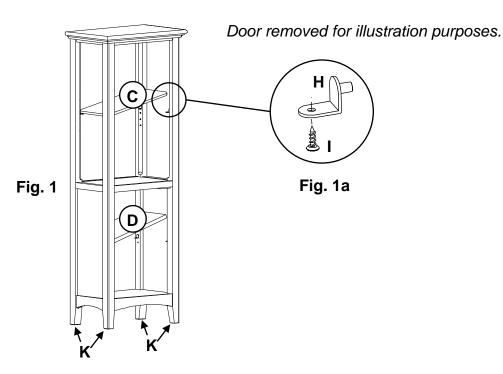

2. Place the tower at its final destination. Rotate the Adjustable Glides (K) found at the corners of the unit until the unit is level. See Figure 1.

## 2078AFGAC; 2078AFCAF McKenzie Media Tower (2Pk)

Assembly Instructions

3. **Tipping restraint:** Locate the stud in the wall behind the unit. Attach a Clip (T1) to one wall stud with two #8 x 2" Black Screws (T3). See Figure 3a. Attach a second clip to one of the back legs of the unit with two #8 x 1" Pan Head Screws (T4). See Figure 3b. Connect the two clips with the Nylon Restraint Strap (T2). Pull the Nylon Restraint Strap (T2) tight so there is no slack. See Figures 3c and 3d. Repeat for the other tower. If you cannot locate two studs, purchase the proper wall attachment hardware for your type of wall and secure the unit.

