## 1306GACd 1306CAFd McKenzie Full Storage Bed

GAC = Glazed Antique Cherry finish CAF = Caffè finish Assembly Instructions

#### **IMPORTANT NOTES:**

- For normal household use only. Not recommended for commercial use.
- Remove items before you move this unit.
- Do not overload the drawers.
- This assembly requires two people.




Drilling, sawing, sanding or machining wood products can expose you to wood dust, a substance known to the state of California to cause cancer. Avoid inhaling wood dust or use a dust mask or other safeguards for personal protection.

For more information go to: www.p65warnings.ca.gov/wood

This product can expose you to chemicals, including formaldehyde, which are known to the State of California to cause cancer. For more information go to: <a href="http://www.p65warnings.ca.gov/furniture">www.p65warnings.ca.gov/furniture</a>

DESIGN SUBJECT TO CHANGE WITHOUT NOTICE.

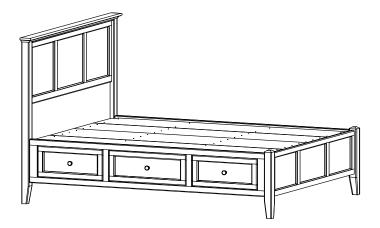

Thank you for allowing us to help you furnish your home. We are certain you will be delighted with your new furniture for many years to come.

### **CUSTOMER SERVICE**

If you ever have questions about your furniture, please do not hesitate to contact us. In the unlikely event you need a replacement part; we can make those parts available through an authorized Whittier Wood Furniture dealer. If you cannot order replacement parts through your dealer, please contact our customer service department.

Hours: Our friendly customer service staff can be reached: Monday-Friday 8:00 a.m. to 5:00 p.m. (Pacific Time).You may leave a message 24 hours a day, seven days a week.

Customer Service: 800-653-3336 • Outside the U.S.: 541-687-0213 Fax: 541-687-2060• Email: info@whittierwood.com



P.O. Box 2827 Eugene, OR 97402 USA

roduction Code:	

F

Parts List

Please identify the parts and check that quantities received match those on this list. If you need to replace a part, refer to the following letter and part name.

### 1309GACd 1309CAFd Headboard/Footboard Kit (x1)

Part	Description		Quantity
А	Headboard Assembly		1
Ва	Footboard Assembly	Fa Fa	1
Da	Trestle With T-Nuts	<b>* * *</b>	7
E	#8 x 1-1/4" Black Screw		33 (9 inserted)
F	1/4" x 1-3/4" Hex Bolt		26
Н	Washer	0	26
Ua	Assembled Foot		3
W	Adjustable Glide (installed)	C	3
YD	#6 x 1/2" Philtruss Screw		8
YG	90° Bracket	60	2
YM	#10 x 3/4" Pan Head Screw (inserted)	anna ann an ann an ann an ann an ann an	12
YN	#8 x 1-1/4" Pan Head Screw (inserted)	***************************************	4
ZP	#8 x 1" Black Screw (inserted)		32
ZQ	Left Bracket (attached)	The same	4
ZR	Right Bracket (attached)	and the second se	4
ZU	1/4" T-Nut (inserted)		28
ZX	#8 x 1-5/8" Black Screw (inserted)		4
ZY	Foot Bracket (attached)	a la	3

#### 1306GACd 1306CAFd McKenzie Full Storage Bed


Parts List

## 1308GACc 1308CAFc Pedestal Kit (x2)


Part	Description		Quantity
E	#8 x 1-1/4" Black Screw (inserted)		30
lb	Pedestal Kit		1
J	Small Drawer Box (assembled)		1
К	Large Drawer Box (assembled)		2
L	Small Drawer Face (attached)		1
Μ	Large Drawer Face (attached)		2
Nc	#8 x 1-1/2" Machine Screw Tuscan (installed)		3
0	Knob (attached)	D)	3
Р	Deckboard		1
Q	20" Drawer Slides (pre-installed sets)	00 00 00	3
Т	#8 x 2" Black Screw (inserted)		12
YD	#6 x 1/2" Philtruss Screw (inserted)	(E) JUILION	18
YE	#6 x 3/4" Philtruss Screw (inserted)		18
YL	#8 x 7/8" Black Lo-Profile Screw (inserted)	accecce ()	16
ZP	#8 x 1" Black Screw (inserted)		16
ZQ	Left Bracket (attached)	and the second	2
ZR	Right Bracket (attached)	And and a second	2
ZX	#8 x 1-5/8" Black Screw (inserted)		16

Tools Required: Phillips screwdriver, 7/16" open end or box end wrench and Tape measure


1. Remove the Trestles (Da) and Assembled Feet (Ua) from the backs of the Headboard (A) and Footboard (Ba) and place them off to the side. See Figures 1 and 1a.

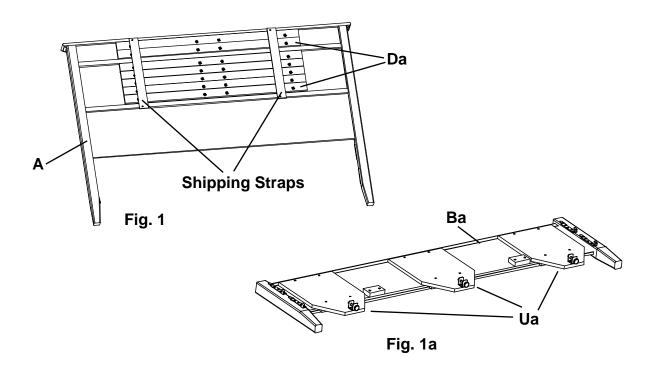


2. Place both Pedestals (Ib) approximately 57" apart as shown in Figure 2.

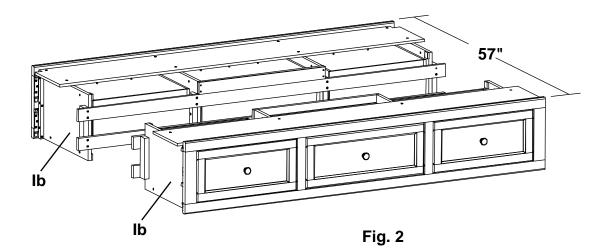


3. To attach the Footboard (Ba) to the Pedestal Assembly (Ib), align the Brackets and slide the Pedestal Assembly down on to the Footboard (Ba). See Figures 3 and 3a.

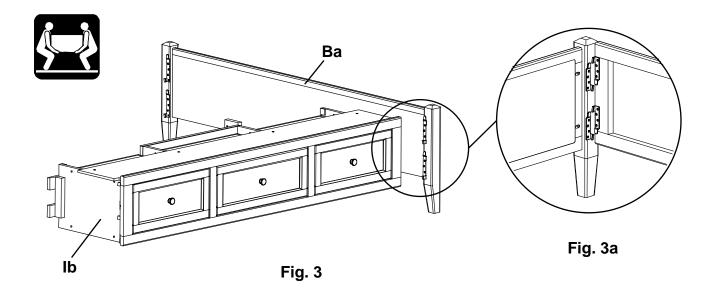

4. Repeat step three for the left side.

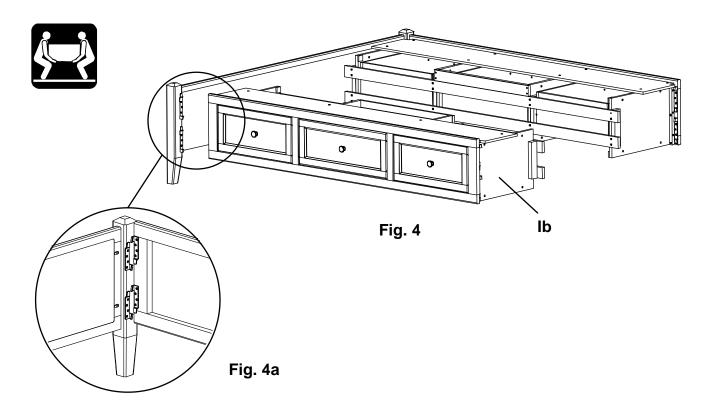


5. Align the Brackets on both sides and slide the Pedestal/Footboard assembly down on to the Headboard (A). See Figure 5.

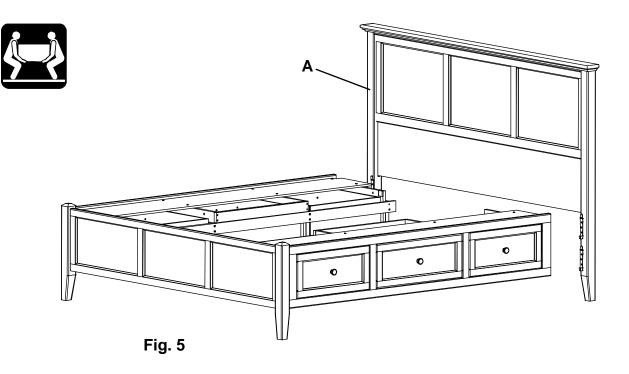

6. Open the drawers. Face the Footboard and stand in between the first and second braces. Place a Trestle with T-Nuts (Da) on the outside surfaces of the first upper left and right braces so that the T-Nuts (ZU) sit near the top. See Figure 6a. Line up the upper edges of the trestle and braces so they are nearly flush. Insert two 1/4" x 1-3/4" Hex Bolts (F) and Washers (H) and tighten. Repeat for the second upper brace.

Place a Trestle with T-Nuts (Da) on the outside surface of the second lower brace so that the T-Nuts (ZU) sit near the bottom. Line up the bottom edges of the trestle and braces so they are nearly flush. Insert two 1/4" x 1-3/4" Hex Bolts (F) and Washers (H) and tighten. See Figures 6 and 6a.

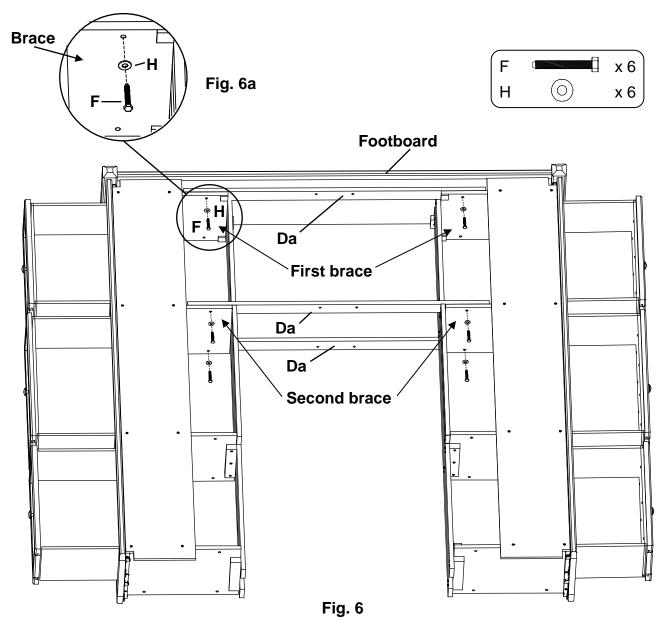


Headboard removed for illustration purposes.

7. Face the Headboard and stand in between the third and fourth braces. Place a Trestle with T-Nuts (Da) on the outside surfaces of the third **upper** left and right braces so the T-nuts sit near the top. See Figures 7 and 7a. Line up the upper edges of the trestle and braces so they are nearly flush. Insert two 1/4" x 1-3/4" Hex Bolts (F) and Washers (H) and tighten.


Place a Trestle with T-Nuts on the outside surface of the third left and right **lower** braces so that the T-nuts sit near the bottom. Line up the bottom edges of the trestle and braces so they are nearly flush. Insert two 1/4" x 1-3/4" Hex Bolts (F) and Washers (H) and tighten. See Figures 7 and 7a.

Repeat for the fourth braces.

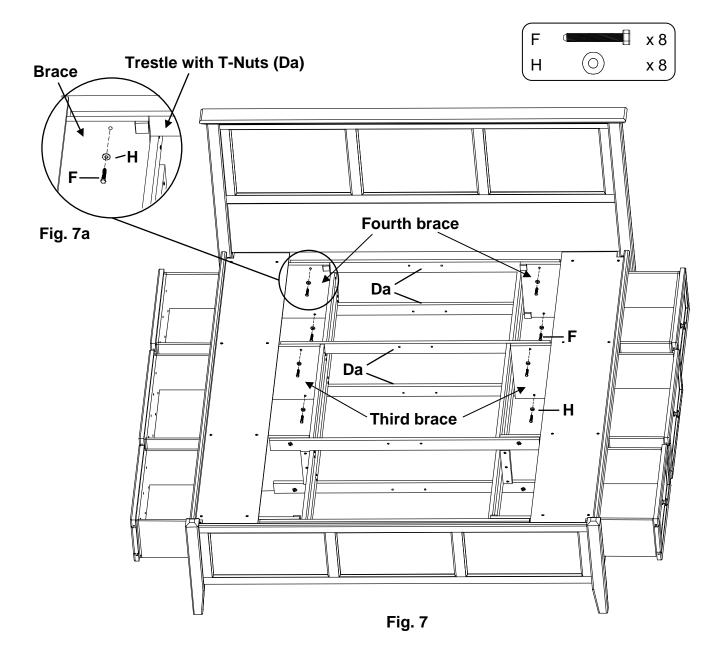

8. NOTE: There are blocks mounted on the back side of the Footboard to support the end of the pedestal eliminating the need for an Assembled Foot in this position where it would be easily visible. Do not attach an Assembled Foot in the position near the footboard.

Facing the Headboard, place two Assembled Feet (Ua) on the inside faces of the third and fourth upper and lower Trestles. Attach with Washers (H) and 1/4" x 1-3/4" Hex Bolts (F). See Figures 8 and 8a.

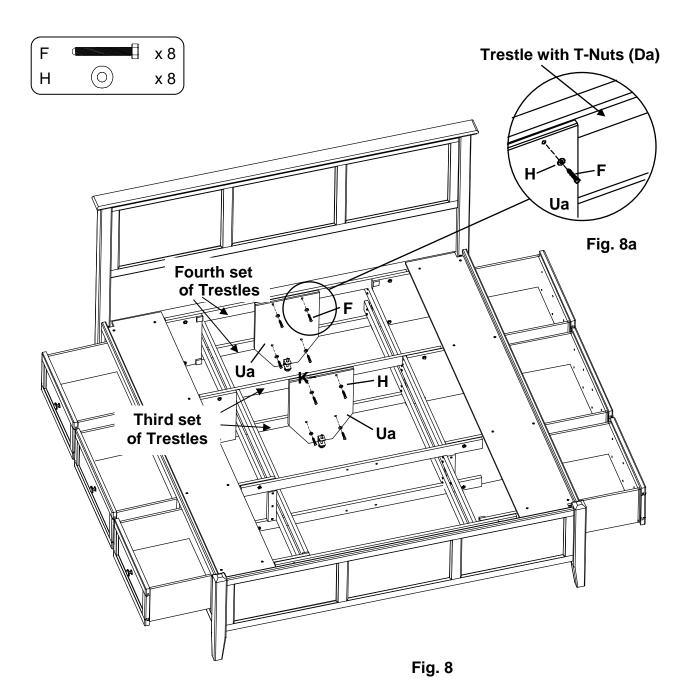


# 9. NOTE: There are blocks mounted on the back side of the Footboard to support the end of the pedestal eliminating the need for a Assembled Foot in this position where it would be easily visible. Do not attach an Assembled Foot in the position near the footboard.


Facing the Footboard, place an Assembled Foot (Ua) on the inside of the second set of Trestles and attach with four Washers (H) and four 1/4" x 1-3/4" Hex Bolts (F). See Figures 9 and 9a.

Place your bed in its final position. Adjust all three Glides (W) found at the bottoms of the Assembled Feet so that the Glides just touch the floor.

#### IMPORTANT: Make sure the Glides touch the floor and carry weight.

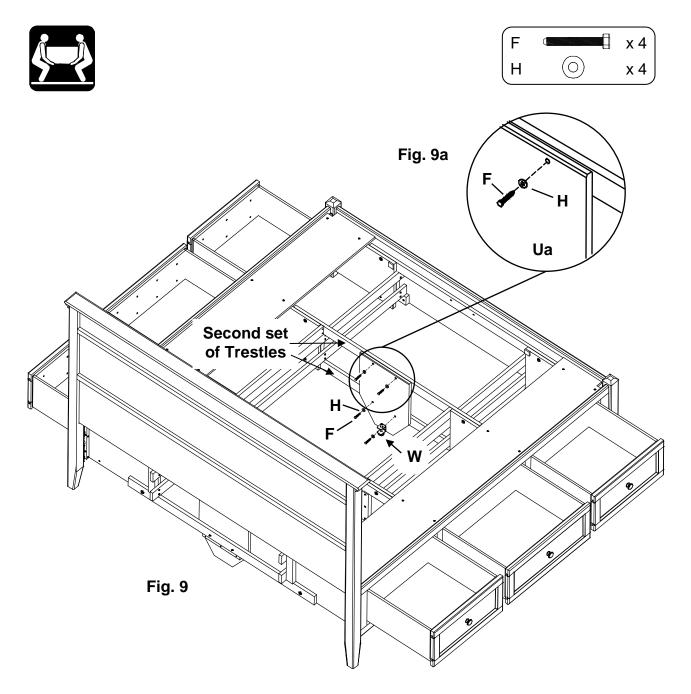


10. Facing the Footboard, attach the Pedestal Assembly to the Footboard with a 90° Bracket (ZG) and four #6 x 1/2" Philtruss Screws (YD). Repeat for the other side. See Figures 10 and 10a.

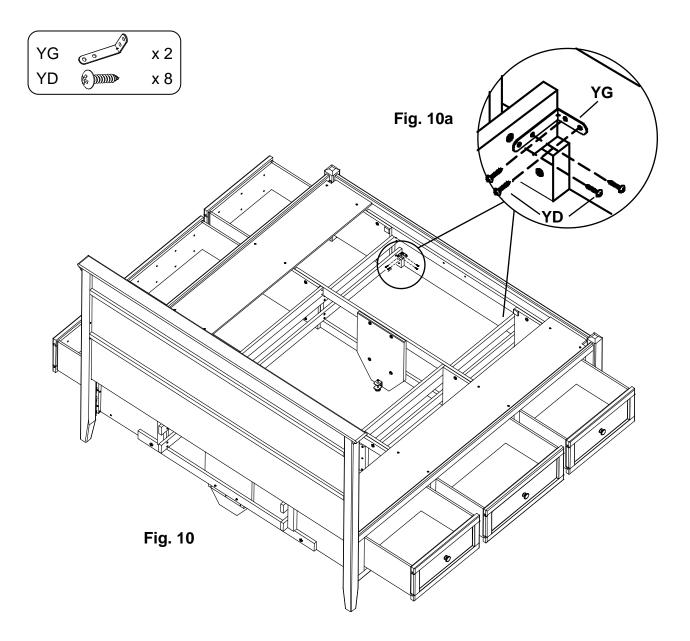

This assembly requires two people.

11. To make sure the bed is square, measure the distance between opposing corners. If one of the measurements is larger, tap on a footboard leg until the measurement is equal. See Figure 11.

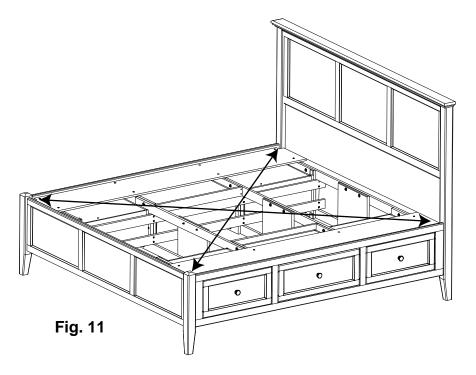

Place Deckboards (P) as shown in Figure 12. There should be a small gap between each deckboard. Secure with #8x1-1/4" Black Screws (E).
If at some time you need to adjust the center feet, remove the deckboard, adjust the glides and reattach the deckboard.

